


PLAT AND RECORD OF SURVEY No. 126

Survey made on request of Henry Thaler

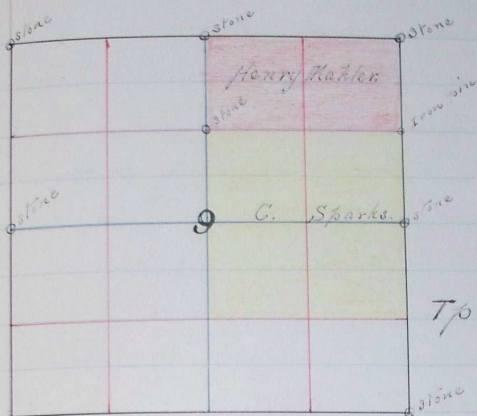

$$\begin{array}{r} 41 \\ 26 \\ \hline 75 \end{array}$$

$$\begin{array}{r} 636 \\ 5700 \\ \hline 30 \end{array}$$

T¹ N. R³² E. W. 1/4

Began Survey Oct 19, 1900

Initial Corner of Survey 1/4 Sec Cor on E line of Sec 9,
Township 1 North Range 32 E.

00 00 = 1/4 Cor. in E line of Sec 9. Thence N. $82^{\circ} 30' 15''$ E.
on true line between Sec 9 and 10

39 80 Intercept E and W line north boundary of Sec 10
at which point set stone to reestablish cor to
Sec. 3, 4, 9 and 10.

Beginning at Cor of Secs 3, 4, 9 and 10 Thence West
on true line between Sec 9 and 4.

39 97 1/2 Set stone, for reestablished 1/4 Corner between
Secs 4 and 9. Thence West on same line

79 95 To Stone corner to Secs 4, 5, 8, and 9, said stone
being the original corner to said sections above
mentioned. \angle 20° E.

Beginning at original Cor to Secs 4, 5, 8 and 9. Thence
South on true line between Sec 8 and 9.

38 69 1/2 Stone original 1/4 Sec Cor in center of highway
and opposite end of fence running S & W
through the center of Sec 8. T¹ N. R³² E.

Course.	Degrees. Minutes.	Chains.	Links.

Beginning at reestablished corner of Sect
2. 4. 9. 10. Thence south on true line
between Sect 9 and 10.

19 44³/₄ Set $\frac{1}{16}$ corner Set stake drove iron pin and
raised mound of stones.

Beginning at reestablished $\frac{1}{4}$ Sec cor on
line between Sect 4 and 7. Thence S on true line
through center of section.

19 67⁵/₈ Set stone for $\frac{1}{16}$ corner and boundary
between lands of Quaker and Habler.

Chairman	}	A. L. Coffey
		S. Hutchinson
Flagman		J. Newbush

I hereby certify that the foregoing are
true and correct field notes of survey
by me.

L. E. Macomber,
County Surveyor.