

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**


Corner originally established by Moody under GLO contract No. 145, dated May 23, 1871. Surveyor General field notes state:

Set post to 48<sup>th</sup> mile. Build rock mound.

Corner reestablished by Currin and Noland under GLO Special Instructions dated May 4, 1887. Surveyor General field notes state:

Set post 48x4x4 ins. 24 ins in the ground for 48<sup>th</sup> Mile post marked 48 M on N and UR on W faces from which:  
A fir 12 in diam. bs N80°E, dist 20 lks marked 48M UR BT.  
A pine 4 in. in diam bs. S80°W dist 12 lks marked 48M UR BT.

T 1 N R 35 E UIR M48



Corner found by Dennis Gaylord in Forest Service corner record dated April 13, 1995. Corner record states:  
Original 4" Pine is a 12" Western Larch snag with healed blaze high on tree. I open and find scribes "8M". Bears S80°W, 7.92 ft. Orig. Fir is gone. Placed a location sign on a 9" white fir N85°E, 22 feet from corner.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found an 18" white fir, alive and vigorous, with Forest Service location tag. A point from which said tree bears N85°E, 22 feet, falls in the edge of a logging road and the 12" larch snag, as described by Gaylord, would fall within the road.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**


At a point S85°W, 22 feet from the white fir tree, I set a 5/8" x 30" iron rebar, with 2 1/2" aluminum cap, marked as shown below, 29 inches in the ground, from which:

The tree described by Dennis Gaylord, bears North 85° East, a distance of 22.0 feet. I add marks M48 BT.

**NEW BEARING OBJECTS:**

A 10 inch White Fir bears South 34° East, a distance of 56.05 feet, marked M48 BT

Set a steel fencepost approximately 0.5 ft. East of corner monument. Corner falls on the East edge of a logging road  
I hereby certify that this monument was set May 5, 2016.

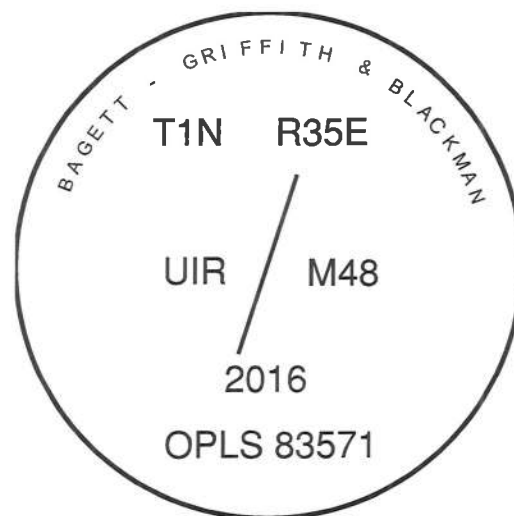

**RECEIVED BY**  
Umatilla County Surveyor  
Date: 5/10/16  
Rec'd By: CT  
No.: 16-058-B

I used a steel tape and magnetic compass in the establishment of the accessories. Magnetic declination used was 15° East. Bearings are to the center of the tree. Distances to the new tree are to a 60d spike in the right hand side of the root crown. Set a brass washer marked OPLS 83571 in the lower BT blaze.

**UIR-48**