

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Rufus S. Moore under GIO contract number 451 dated June 12th, 1882. Surveyor General field notes state:
 Set a post 4 ft. long 4 ins. sq. 24 ins. in ground for cor. to secs. 27,28,33, and 34 marked T1SR35ES27 on NE, T1SR35ES28 on NW, S33 on SW and S34 on SE faces. With 1 notch on S. and 3 notches on E edges from which:
 A Larch 3 ins. dia. bears N 20° E 12 lks. dist. marked T1S R35E S27 BT
 A Larch 12 ins. dia. bears N 16° W 32 lks. dist. marked T1S R35E S28 BT
 A Pine 3 ins. dia. bears S 73° W 23 lks. dist. marked T1S R35E S33 BT
 A Pine 12 ins. dia. bears S 18° E 116 lks. dist. marked T1S R35E S34 BT

T 1 S R 35 E V-13

	S	
	33	

Corner re-established by Manius Buchanan under GIO contract number 635 dated April 19, 1895. Surveyor General field notes state:
 Find post lying down, much decayed; all witnesses gone or dead excepting the one in sec. 34: at corner point as indicated by the remaining witnesses and blazes to re-establish this cor. set a tamarack post 4 ft. long, 4 ins. square, 24 ins. in the ground, for cor. of secs. 27, 28, 33, and 34 marked T1SS27 on NE, R35ES34 on SE, S33 on SW and S28 on NW faces; with 1 notch on S. and 3 on E. edges, from which:
 A Tamarack 6 ins. diam. bears N 22° E 17 lks. dist. marked T1S R35E S27 BT
 A Pine 12 ins. diam. bears S 18° E 116 lks. dist. marked T1S R35E S34 BT
 A Pine 5 ins. diam. bears S 46 ½° W 24 lks. dist. marked T1S R35E S33 BT
 A Pine 5 ins. diam. bears N 74° W 25 lks. dist. marked T1S R35E S28 BT

Corner was found by Dennis Gaylord in 1981. Record states:
 A sawn Ponderosa Pine stump, now decayed with a partially healed, charred lower blaze with fragmentary scribes visible bears S 18° E, 76.6 feet.
 A sawn Western Larch stump with a portion of a healed lower blaze bears N 26° E, 11.2 feet.
 A down and decayed Western Larch (record Pine) with full scribing visible which I recovered in 1981 is now gone, likely destroyed by recent logging operations. In 1981, I found the root hole of this tree to bears S 46°30' W, 15.8 feet.
 At the corner point as determined by record distance from the original bearing tree remnants, I set a 1" x 30" iron pipe 27" into the ground with a 2 ½" brass cap attached. The cap is marked as shown, from which:
 A 9" White Fir bears S6°30'E, 65.7 feet scribed "T1S R35E S34 BT"
 A 16" Western Larch bears S71°W, 62.6 feet scribed "T1S R35E S33 BT"
 A 13" Western Larch bears N68°30'W, 97.9 feet scribed "T1S R35E S28 BT"
 A 14" Western Larch bears N81°E, 94.9 feet scribed "T1S R35E S27 BT"

DESCRIPTION OF CORNER EVIDENCE FOUND:



Found a 1" iron pipe, 4" above ground with 2 ½" brass cap marked as shown below, from which:
 A 14" White Fir bears South 6° East, a dist. of 65.7 feet, alive with healed blaze.
 An 18" Western Larch bears South 71° West, a dist. of 62.6 feet, alive and vigorous with healed blaze.
 A 14" Western Larch stump bears North 67° West, a dist. of 97.9 feet, with "T" scribe visible upon opening healed blaze.
 A 16" Western Larch bears North 81° East, a dist. of 94.9 feet, dead and down with "T1S R35E S27 BT" scribes visible.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

NEW BEARING OBJECTS:

A 9" Ponderosa Pine bears North 27° East a dist. of 12.35 ft., marked T1S R35E S27 BT.
 A 6" Ponderosa Pine bears North 68° West a dist. of 36.25 ft., marked T1S R35E S28 BT.

I hereby certify that the corner was perpetuated on August 5, 2019.
 Witness: Kyle A. Tucker
 Set steel fence post approx. 1 foot South

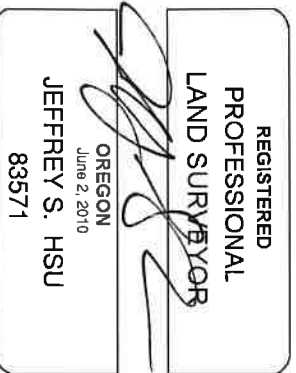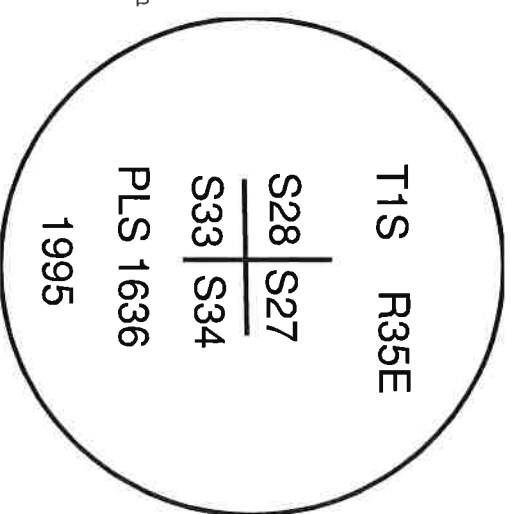

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 13° East declination, the distances are to a 60d spike driven into the side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

Renewal Date: June 30, 2021

V-13

19-079-8