

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla DATE: 04/27/15

CORNER DESIGNATION: Southeast Corner of William McKay Donation Land Claim No. 38, Township 2 North, Range 32 East, W.M.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by Daniel Chaplin, Deputy Surveyor, under special instructions dated October 6, 1864. Notes State: Set a post for Southeast Corner in mound of earth with charred stake and pits as per instructions. Both Z.F. Moody and Currin & Nolin in contracts surveying the Umatilla Indian Reservation Boundary set this corner or found this corner. Peter Zahner in his survey for the Reserve (Reservation) Addition to the City of Pendleton found this corner. Kimbrell in various surveys either found or set this corner.

MONUMENT AND ACCESSORIES FOUND: None. Held the intersection of a long standing fence running North and South long thought to represent the East line of the McKay DLC, and a line parallel with, and 66 feet North of the South line of the Southwest Quarter of Section 9 as established on Survey No. 13-135-C. See Umatilla County Partition Plat No. 2015-08 for further details.

MONUMENT MARKING DETAIL:

T2N R32E
WM. McKay |
D.L.C. No. 38 S.E. Cor.
2015
PLS 54657

MONUMENT SET: At the corner point set a 2 3/8" dia. brass cap on a 1 1/4"x30" galvanized iron pipe with the top of the cap flush with the ground surface in a 2.5' dia. mound of stone. Monument marked as shown in "Monument Marking Detail".

From which:

A 5/8" rebar with 1 1/4" yellow plastic cap stamped "OR PLS 1106 WA PLS 17372" in fence line as reported on Survey No. 13-135-C bears South 89°38'46" East, 36.11 feet. (Existing)
A 5/8" rebar with 1 1/4" yellow plastic cap stamped "OR PLS 1106 WA PLS 17372" as reported on Survey No. 13-135-C bears South 27°32'51" West, 74.23 feet. (Existing)
A 5/8" rebar with 1 1/4" yellow plastic cap stamped "OR PLS 1106 WA PLS 17372" as reported on Survey No. 13-135-C bears North 89°38'46" West, 57.01 feet. (Existing)
A 5/8" rebar with 1 1/2" Alum. cap stamped "KEL PLS 933" as reported on Survey No. 13-135-C bears North 88°01'00" West, 20.94 feet. (Existing)
A 1/2" rebar believed to be set by Ralph Thompson in a unrecorded survey for Cheney and Norden bears North 84°14'48" West, 21.49 feet. (Existing)
A 5/8"x24" rebar with 1 1/4" purple plastic cap stamped "Wells Surveying PLS54657" in North South fence line at the base of a hill bears North 01° East, 39.1 feet. (New)

Attached bearing object signs to new accessories. Set steel fence post with witness post sign 1.5 feet North of Monument.

Continued on Page 2

OREGON STATE PLANE COORDINATE, North Zone, NAD83(2011), epoch 2010.00,
International Feet:

N= 731207.99
E= 8630583.65

LOCATION AND COMMENTS: Corner is located in a long standing North-South running
fence.


FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

/2N32DLC38

Page 2

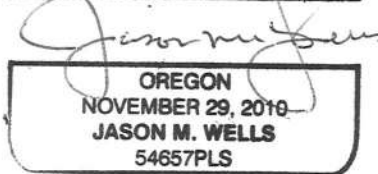

NEWS: 6:30:16