

OREGON CORNER RESTORATION FORM

Section 1 Township 1N Range 32E
 County Umatilla Date: January 23, 2009

Corner Designation: 1N32A25

Condition Report Only
 Not found
 Remonumented
 Unrecorded
 Surveyed in
 Referenced out



Corner to section 31, T2N, R33E, section 36, T2N, R32E, section 1, T1N, R32E, and section 6, T1N, R33E, W.M., Umatilla County, Oregon.

Previous Renewals / Surveys, etc.

Corner originally set by David P. Thompson under contract No. 106 dated August 16, 1864. His record reads: Set post, for corner to Townships 1 and 2 North of Ranges 32 and 33 East in mound of earth with charred stake, pits, trench &c. James Currin and James Noland under special instructions dated May 4, 1887 state: Found old cor. to Tps. 1 and 2 N. R. 32 and 33 East. Set a basalt stone 10x8x7 ins. dug pits and raised earth mound. Lincoln Wilkes in the Diminished Indian Reservation Survey states: Set an iron post, 3 feet long, 2 ins. diam., for cor. of Tps. 1 and 2 N. Rs. 32 and 33 E. with brass cap. Mr. Bill Wells in survey 94-109-C found the Wilkes monument and reports a GLO Brass capped reference monument 40 feet south and a BIA brass capped Reference monument 12 feet north. Mr. Wells stated that both references were of unknown origin. Mr. Brian Siebold, under special instructions dated March 16, 2000 also found the Wilkes Brass Cap but reported the reference monuments to be a brass cap on a 2" iron post by Wilkes bearing North 0°39'35" East 40.00 feet and a brass cap on a 1 1/2" diam. iron pipe by C.E. Redfield bears South 0°39'11" West 12.00 feet;

Monument and Accessories found: (condition and source)

I found the Wilkes Brass Cap 12" below the surface of a paved road. One brass cap stamped "Indian Allotment 1919 12' North" bears South 0°17'26" West a distance of 12.04 feet; A brass cap stamped "US General Land Office Survey 40' South" bears North 0°35'52" West a distance of 39.97 feet.

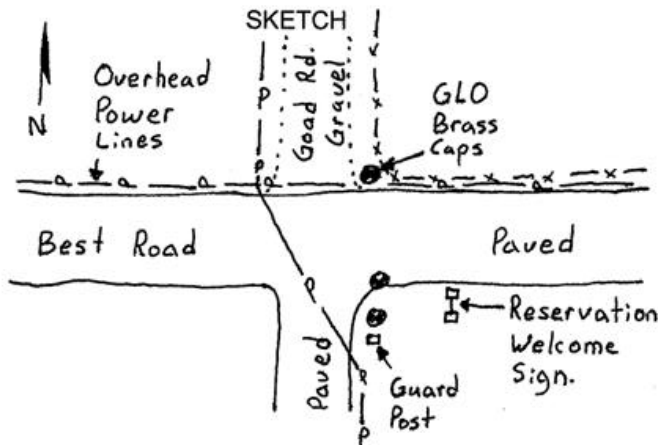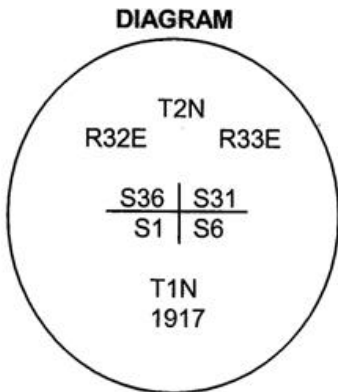

Monument and Accessories set:

None. This certificate is prepared to report the NAD 83/1991 state plane coordinates and to confirm the location of the bearing objects listed above.

The monuments were tied using a Trimble R7/R8 RTK GPS SYSTEM in static mode.

Location and comments
 NAD 83/1991 State Plane Coordinates
 Oregon North Zone
 N = 710,414.93 ift
 E = 8,651,159.07 ift

Compass Declination
 Firm / Agency
 Witness Tree Surveying
 Address
 P.O. Box G
 Pilot Rock, Or. 97868
 Party Chief
 Stephen K, Haddock

Surveyors Seal

RECEIVED BY:
Umatilla County Surveyor
 Date: 6-10
 Rec'd By: KK
 No. 10-95-c

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Stephen K. Haddock

OREGON
 JULY 9, 2001
 STEPHEN K. HADDOCK
 56295LS

RENEWAL DATE 6-30-11