


History of original corner establishment:


The original corner was established by Daniel Chaplin on November 20, 1864, under GLO contract no. 107, as follows:

Set stone, 14" x 10" x 5", for corner to sections 9, 10, 15 & 16.

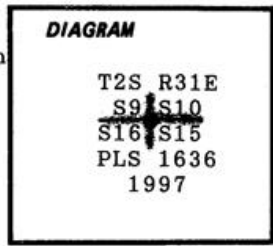

Description of corner evidence found:

The original corner stone is loosely set in a mound of stones at the intersection of fences projecting south, west and northeasterly. The stone is 16" x 8" x 7" and is plainly marked with 3 notches on one edge and 2 notches on another.

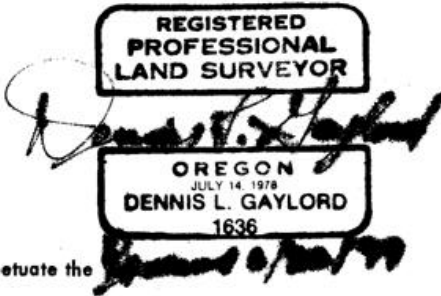

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of the original corner stone, I set a 1 1/2" x 30" iron pipe 28" into the ground. A 2 1/2" brass cap attached is marked as shown in the diagram above. I bury the original corner stone alongside the east side of the pipe and build a mound of stones around the pipe, from which:

A 5/8" x 36" iron rod, set 35" into the ground with a 3/4" brass washer, marked "PLS 1636 S10", attached at ground level, bears N27°E, 97.1 feet.

A 5/8" x 24" iron rod, set 21" into the ground with a 3/4" brass washer, marked "PLS 1636 S15", attached at ground level, bears S29°E, 84.1 feet.

A 5/8" x 24" iron rod, set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 S16", attached at ground level, bears S36°W, 104.5 feet.

A 5/8" x 24" iron rod, set 23" into the ground with a 3/4" brass washer, marked "PLS 1636 S9", attached at ground level, bears N44°W, 93.5 feet.

I hereby certify the above corner point was perpetuated as hereon described on October 13, 1997. Magnetic declination: 20°E.

Office of _____ County of _____
 State of _____, I hereby certify that the within instrument was filed in this office
 for record on the _____ day of _____, 19____
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

RECEIVED BY
 Umatilla County Surveyor
 Date 10-97
 Rec'd By KK
 No. 97-1952R