

**OREGON CORNER RECONSTRUCTION FORM**

Section 28 Township 2S Range 32E  
 County Umatilla Date: April 13, 2007

Corner Designation: 2S32V9



Corner to sections 28, 29, 32, and 33, T2S, R32E,  
 W.M., Umatilla County, Oregon.

Condition Report Only  
 Not found  
 Remonumented  
 Unrecorded  
 Surveyed in  
 Referenced out

Previous Renewals / Surveys, etc.

Corner originally set by Daniel Chaplin under contract No. 107 dated September 21, 1864. His record reads: Set stone, 36 x 18 x 10 for cor. to secs. 28, 29, 32 & 33. The corner was re-established by John Arnold in his completion survey under contract No. 551 dated March 19, 1890. His record reads: Set basalt stone, 14 x 10 x 5 ins., 10 ins. in ground, for Cor. to Secs. 28, 29, 32 & 33, marked 4 notches on E. edge and 1 notch on S. face; dug pits, 18x18x12 ins. in each Secs., 5 1/2 ft. dist. and raised a mound of earth, 2 ft. high x 4 ft. base along side, from which, A quaken aspen, 8 ins. diam. brs. N32°W., 250 lks. dist., marked T2S R32E S29 BT. No other tree in limits. No traces of any other cor. at this place.

Monument and Accessories found: ( condition and source )  
 None. This point falls on a 40° slope facing west with many animal trails.

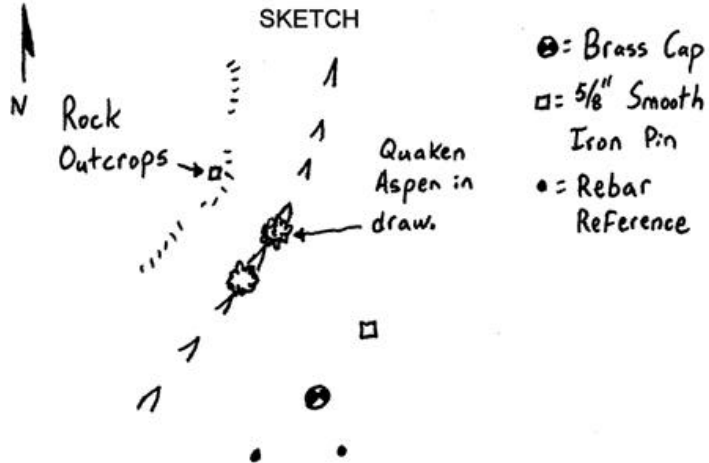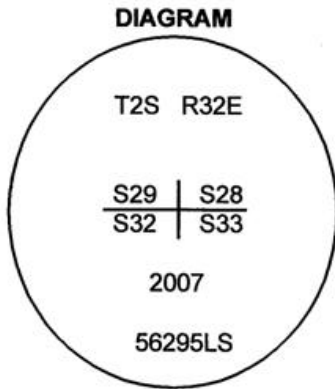

**MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)**

I set a 1 1/2" x 30" galvanized iron pipe with a 2 1/4" brass cap stamped as shown in the diagram above at the proportionate point. The top of the monument is 6" below the surface of the ground. For references, I set two, 5/8" by 24" rebars with 1 1/8" orange plastic caps attached, stamped WTS and 56295LS as described below:

- an iron rebar bears S19°00'28"W, 107.65 feet;
- an iron rebar bears S26°43'53"E, 60.84 feet;
- I also set two 5/8" x 20" smooth copper coated iron pins with orange plastic caps wired to the pin as follows:
- an iron pin bears N13°43'06"W, 238.18 feet in a rock outcrop;
- an iron bears N58°00'36"E, 34.00 feet;

The monument was set and references were tied using a Trimble R7/R8 RTK GPS.

Location and comments

Compass Declination

Surveyors Seal

RECEIVED BY:  
Umatilla County Surveyor  
 Date: 6-07  
 Rec'd By: KK  
 No. 07-169-C

Firm / Agency  
 Witness Tree Surveying  
 Address  
 P.O. Box G  
 Pilot Rock, Or. 97868  
 Party Chief  
 Stephen K, Haddock

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*Stephen K. Haddock*

OREGON  
 JULY 9, 2001  
 STEPHEN K. HADDOCK  
 56295LS

RENEWAL DATE 6-30-07