


History of original corner establishment:

Original corner established by Rufus S. Moore on September 26 1882, under contract number 451, as follows: Set a post for the corner, from which:
 A 5" pine bears N69°E, 27 links (17.82 feet). A 3" pine bears N61°W, 42 links (27.72 feet). A 3" pine bears S49°W, 16 links (10.56 feet). A 5" pine bears S63°E, 28 links (18.48 feet).
 In October, 1917, GLO surveyor L. E. Wilkes perpetuated this corner under Group Number 38, as follows: In place of the decayed post, set a basalt stone, 16" x 12" x 10", 11" into the ground marked with 5 notches on the south edge and 4 notches on the east edge, from which:
 A 8" Lodgepole Pine bears N67°E, 27 links (17.82 feet)(old BT). A 8" Lodgepole Pine bears S69°E, 28 links (18.48 feet)(old BT). A 20" fir bears S21°30'W, 153 links (100.98 feet). A 10" Lodgepole Pine bears N73°W, 59 links (38.94 feet). A basalt stone, 4' x 4' x 2' above the ground, marked with an X on top, bears west, 30 links (19.80 feet).

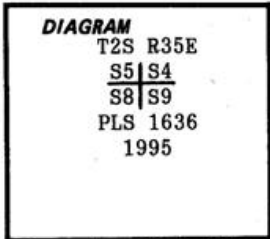

Description of corner evidence found:

The corner stone, which is 16" x 11" x 10" and marked with 5 notches on the south edge, no other marks, is solidly set 11" into the ground and surrounded by a mound of stones, from which:
 A 10" Lodgepole Pine is down. Scribes are visible on a nearly healed blaze. Root hole bears N70°E, 17.8 feet.
 A 11" Lodgepole Pine is down. Scribes are visible on a previously opened blaze. Root hole bears S67°E, 18.5 feet.
 A boulder, 54" x 48" x 30" above ground and marked with faint chisel marks on the nearest part of the top, chisel marks bear N89°W, 19.8 feet.
 The root hole of the decayed remains of the 20" fir, with no remaining marks, bears S24°W, 101.0 feet.


Description of monument and accessories | established to perpetuate the original location of this corner:

Moving the corner stone aside, I set in it's place a 1" x 30" iron pipe, 20" into the ground in a mound of stones. The corner stone is buried along the west side of the pipe. A 2 1/2" brass cap attached is marked as shown in the diagram above, from which:

- A 19" Douglas-fir, scribed "T2S R35E S5 BT", bears N1°W, 15.9 feet.
- A 17" Douglas-fir, scribed "T2S R35E S4 BT", bears N65°E, 6.7 feet.
- A 18" Ponderosa Pine, scribed "T2S R35E S8 BT", bears S19°W, 78.4 feet.
- A 17" Western Larch, scribed "T2S R35E S9 BT", bears S51°E, 52.8 feet.

The new bearing trees are scribed on double blazes, have a 5/8" brass washer, marked "PLS 1636", nailed flush to the lower blaze and have a bearing tree sign nailed above the blazes.

I hereby certify the above corner point was perpetuated as hereon described on November 19, 1995. Magnetic declination: 20°E.

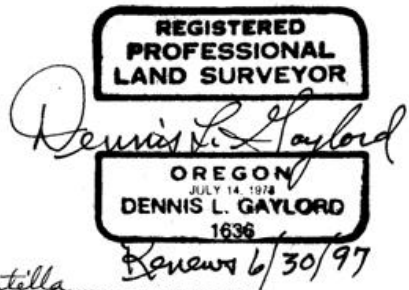

Office of...the Surveying Dept...... County of Umatilla.....
 State of Oregon..... I hereby certify that the within instrument was filed in this office
 for record on the 28 day of November....., 1995
 by
 (COUNTY OFFICIAL) (DEPUTY)

RECEIVED BY
 Umatilla County Surveyor
 Date 11-95
 Rec'd By KK
 No. 95-208-A