


History of original corner establishment:

Original corner established by Rufus S. Moore under contract number 451, on September 29, 1882, as follows:

Set a post for the corner from which:

- A 4" fir bears North, 40 links (26.4 feet).
- A 10" Tamarack bears S12°W, 37 links (24.42 feet).
- Both scribed 1/4 S BT.

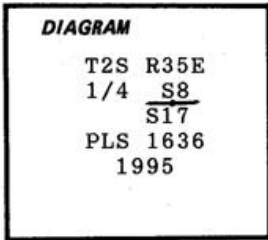

Description of corner evidence found:

The original post is gone.

The original 4" fir is now a 24" sawn fir stump 6 feet tall with healed blaze. Bears North, 26.4 feet.

The original 10" Tamarack is now a 14" Western Larch snag with healed blaze opened to scribes "4 S". Bears S12°W, 24.4 feet.


Description of monument and accessories | established to perpetuate the original location of this corner:

At the corner point determined by reference to the original bearing trees, I set a 1" x 30" iron pipe 27" into the ground. A 2 1/2" brass cap attached is marked as shown in the diagram above, from which:

- A 16" Western Larch, scribed "1/4 S8 BT", bears N16°E, 176.4 feet.
- A 5/8" x 36" iron rod set 33" into the ground bears S72° 30'E, 29.4 feet.
- A 10" Western Larch, scribed "1/4 S17 BT", bears S78°W, 97.1 feet.
- A 11" Western Larch, scribed "1/4 S8 BT", bears N9° 30'W, 49.8 feet.

The new bearing trees are scribed on double blazes and have a 5/8" brass washer, marked "PLS 1636", nailed flush to the lower blaze, and have a bearing tree sign nailed above the blazes.

I hereby certify this corner was perpetuated as hereon described on October 14, 1995. Magnetic declination: 20°E.

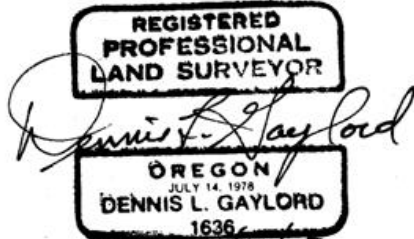

Office of SURVEY DEPT. County of Umatilla
 State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 23rd day of October, 1995
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

RECEIVED BY
 Umatilla County Surveyor
 Date 10-95
 Rec'd by KK
 No. 95-180-R