

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla DATE: 6/04/15

CORNER DESIGNATION: P-5, The West Quarter Corner of Section 20, Township 3 North, Range 35 East, W.M.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by Currin and Noland under contract dated May 4th, 1887. Deposited charred stake 12" in the ground for 1/4 corner, dug pits and raised mound of earth. John Kimbrell, in Record of Survey No. 328, Recorded in the Record of Private Surveys Book states he set a stone at this corner. There is an error in his notes however. His notes state "South between 19 & 20" and at 80.78 chains he calls the corner to sections 17, 18, 19, & 20. Actually he means the corner to sections 19, 20, 29, & 30, as he is subdividing section 20 in said survey.

MONUMENT AND ACCESSORIES FOUND: Found an unmarked 18"x14"x8" stone laying flat, 6" in the ground surrounded with an old roll of fence wire and an old wood post.

MONUMENT MARKING DETAIL:

T3N R35E
1
4
S19|S20
2015
PLS 54657

MONUMENT SET: Set a 2 3/8" brass cap on 1 1/4"x30" galvanized iron pipe with the top of the monument flush with the ground. Buried found stone 6" in the ground laying flat on the West side of the monument. Monument marked as shown in "Monument Marking Detail".

From which:

A 5/8"x24" iron rebar with 1 1/4" blue plastic cap marked "Wells Surveying PLS 54657" 2" above ground level in bank bears 20°14'29" (grid azimuth), 61.4 feet.

A 5/8"x24" iron rebar with 1 1/4" blue plastic cap marked "Wells Surveying PLS 54657" flush with the ground in a unfarmed field corner bears 62°47'51" (grid azimuth), 55.6 feet.

A 5/8"x24" iron rebar with 1 1/4" blue plastic cap marked "Wells Surveying PLS 54657" flush with the ground in a unfarmed field corner bears 172°54'57" (grid azimuth), 20.7 feet.

A 3/4" brass washer stamped "PLS 1106" 16" above ground level in the South face of Pacific Power Pole No. 199501 bears 344°22'51" (grid azimuth), 10.8 feet.

Rotate 1°17'17" counterclockwise for True


LOCATION AND COMMENTS: Corner is located at the end of a farmed field road in an unfarmed area where farmed fields and power lines come together. A field berm extends South from the corner. A field berm with power pole line extending East is approximately 12' North of the corner monument.

FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

COMPASS DECLINATION: 18° East Surveyor's Seal

/3N35P5

15-064-C

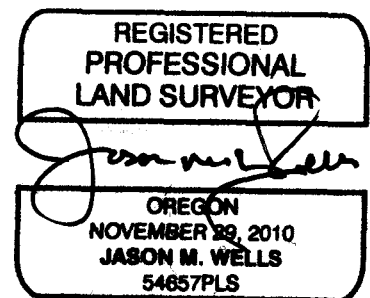

RENEWS: 6:30:16