


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

2-25

History of original corner establishment:
 Corner monumented by William H. Odell under
 contract No. 114, in 1866,

- 24" diam. Fir for Corner
- 20" diam. Fir, S.40°W., 21 links
- 18" diam. Fir, N.30°W., 65 links
- 16" diam. Fir, N. 65°E., 40 links

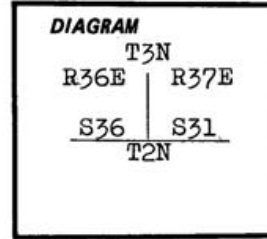

Description of corner evidence found:

32" D.B.H. Douglas Fir snag, S.40°W., 13.9', with scribes visible
 36" D.B.H. White Fir snag, N.43°W., (N.30°W.), 50.8' (65links) with
 reverse scribes visible

C.J. MARTIN SURVEYING
 2751 JUNIPER ST.
 SWEET HOME, OR 97386


**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

Clayton J. Martin

OREGON
JULY 18, 1900
CLAYTON-JESSE MARTIN
 1910

**Description of monument and accessories | established to perpetuate the
 original location of this corner:**

Set a 2 1/2" diam. brass cap on a 2"x30" iron pipe at record bearing and
 distance from Southwest B.T. as this is best fit from evidence available.
 Bearing and distance from Northwest B.T. will not fit but face of tree
 points to corner.

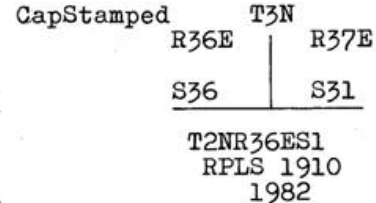

- 16" D.B.H. Douglas Fir, N.87°E., 36.7', scribed
 T3NR37ES31BT
- 14" D.B.H. Spruce, N.80°W., 43.0', scribed
 T3NR36ES36BT

Both B.T.s. have brass washers marked RPLS 1910
 between B&T, red painted bands, B.T. tags, attention
 signs, steel fence posts, 4.0+ North & West of Corner with attention,
 monument and boundary signs attached.

Office of Surveyor County of Umatilla
 State of Oregon I hereby certify that the within instrument was filed in this office
 for record on the 30th day of September, 1982
David Lumber by Betty Shalt
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

RECEIVED BY
 Umatilla County Surveyor
 Date 9-82
 Rec'd by BLS
 No. 82-100-R