

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

1879 G.L.O. SURVEY GEORGE PERSHIN
 "SET BASALT STONE 16X12X3 AND STAKE IN MOUNDS OF STONE ON STEEP NORTH POINT OF SPUR AT POINT OF INTERSECTION WITH 4TH STANDARD PARALLEL NORTH 16.1 CHS WEST FROM THE STANDARD COR TO SEC 31 AND 32."

DESCRIPTION OF CORNER EVIDENCE FOUND:

FOUND 18X11X4" BROWN BASALT STONE ON STEEP NORTH SLOPE RINGED WITH ROCKS COVERED IN DRIED MOSS. VERTICAL BUTTE LIES SOUTH 10.3 FEET. NO MARKINGS ON STONE.

DESCRIPTION OF SET MONUMENT AND ACCESSORIES:



SET A 3-1/4" ALUMINUM CAP ON 3/4" x 30" REBAR STAMPED "DO NOT DISTURB T5N R37E S31 S6 CC S5 T4N R37E OR70938LS 2021 DJ&A, P.C. LUEBKE" IN PLACE OF STONE, STONE SET UPSIDE DOWN ALONGSIDE.

NEW BEARING OBJECTS:

SET 1" RED PLASTIC CAPS ON 1/2" X 30" REBAR MARKED DJA CP IN EACH QUADRANT:
 -N42°03'38"E, 22.40'
 -N39°22'13"W, 22.47'
 -S41°28'32"E, 13.81'
 -S73°47'44"W, 13.62'

SURVEYOR'S CERTIFICATE:

I HEREBY CERTIFY THAT THIS CORNER WAS MONUMENTED ON MAY 18, 2021.

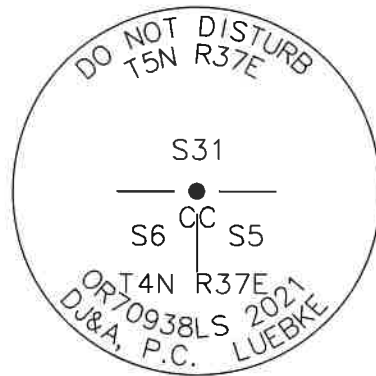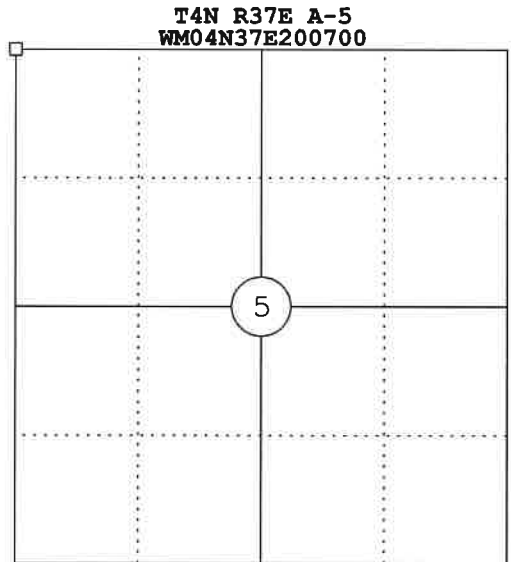

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Kurt Luebke

OREGON
JULY 9, 2002
KURT A. LUEBKE
70938

MONUMENT AND NEW REFERENCES WERE SET USING A TRIMBLE R10 GNSS SYSTEM.

NAD83 (2011) (EPOCH 2010.000)
LATITUDE: N45°51'38.30650"
LONGITUDE: W118°13'53.54386"

EXPIRES 12-31-2022