


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Jacob Cooper under GLO Contract No. 397, dated July 1, 1881. Surveyor

T 2 S R 35 E A-11

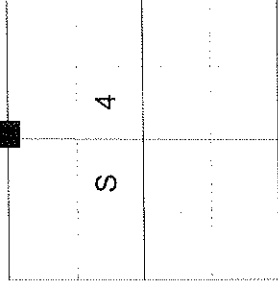

General field notes state:
Set post 3 1/4 ft. long 3 ins. square 18 ins. in the ground on tableland in young pine timber, and undergrowth of same, for 1/4 sec. cor. marked 1/4 S. on N and S faces from which:
A pine 6 ins. diam. bears N65° W 3 lks. dist. marked 1/4 S.B.T.
A pine 4 ins. diam. bears S24° E, 4 lks. dist. marked 1/4 S.B.T.

Corner monumented by Marius Buchanan under GLO Contract No. 635, dated April 19, 1895. Surveyor

General Field Notes state:

I do not find any trace of the old corner, therefore set a basalt stone 17x11x6 ins, 12 ins. in the ground for 1/4 sec. cor. marked 1/4 S. on N. face from which:
A pine 6 ins. diam. bears N.8°E. 61 lks. dist. marked 1/4 S. B.T.
A fir 5 ins. diam. bears S.19°W. 57 lks. dist. marked 1/4 S. B.T.

Corner perpetuated by Andrew T. Blachly in September of 1991. Umatilla County monumentation record 91-76-R states:
Referenced center top of stone, lifted stone, set 5/8" Iron Rod with Aluminum Cap level with bottom of stone cavity, reset stone over rod in cavity, compacted soil around stone. New accessories:

- Orange Carsonite set 2 feet South of STONE & I.R. w/ALUM. CAP.
- 15" Tamarack S64°10'E 8.2' Scribed "1/4 S4 BT"
- 19" White FIR S63°19'E 79.3' Scribed "1/4 S4 BT"
- 17" White FIR S14°30'W 53.7' Scribed "X BT"
- 17" White FIR S35°13'W 38.0' Scribed "1/4 S4 BT"

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2 1/2" aluminum cap, marked as shown below, on a 5/8 iron pin, underneath a stone, 19"x15"x12", from which:
A 17" tamarack snag, 5' tall bears South 64° East a dist. of 8.20 ft., dead and standing with healed blaze.
A 21" white fir snag, bears South 63° East a dist. of 79.30 ft., dead and standing with healed blaze.
A 18" stump 2' tall bears South 14° West a dist. of 53.70 ft., dead and decaying.
A 18" stump 3' tall bears South 35° West a dist. of 38.00 ft., dead and decaying.
A 4' tall orange carsonite post bears South 3'.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


From the aluminum cap monument,

NEW BEARING TREES:

- A 4" White fir bears South 47° East a dist. of 13.95 ft., marked "1/4 S4 BT".
- A 4" White fir bears South 13° East a dist. of 10.65 ft., marked "1/4 S4 BT"
- A 7" Douglas fir bears South 42° West a dist. of 8.35 ft., marked "1/4 S4 BT".
- A 5" Lodgepole pine bears South 80° West a dist. of 27.80 ft., marked "1/4 S4 BT".

I hereby certify that the corner was perpetuated on September 5, 2018.

Witness: Kyle A. Tucker, Ryan Skeen

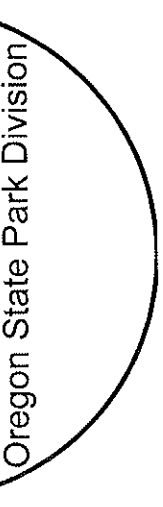

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2019

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 13° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BF blaze of the new bearing trees.