


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Original corner set by Rufus Moore, under GLO contract No. 451, dated June 12, 1882. Surveyor General Record States:

T 2 S R 35 E J-05

Set a post 4 ft. long, 4 ins. square, 24 ins. in the ground for cor. to secs. 7, 8, 17, and 18 marked T2SR35ES8 on NE, T2SR35ES7 on NW, S18 on SW, and S17 on SE faces with 4 notches on S and 5 notches on E edges from which:



- A Tamarack, 6 ins. in diam. bears N40°E, 14 lks. dist. marked T2SR35ES8 BT.
- A Tamarack, 6 ins. in diam. bears N37°W, 10 lks. dist. marked T2SR35ES7 BT.
- A Tamarack, 30 ins. in diam. bears S31°W, 19 lks. dist. marked T2SR35ES18 BT.
- A Fir, 7 ins. in diam. bears S45°E, 1 lks. dist. marked T2SR35ES17 BT.

Corner recovered and replaced by L.E. Wilkes under GLO special instructions dated February 20, 1917, included under Group No. 29. Field notes state:

The cor. of secs. 7, 8, 17 and 18, which is an old post, 3 ins. sq., 12 ins. above ground, marked and witnessed as described by the surveyor general, except that the SE and NW bearing trees are now dead. I perpetuate this cor., as follows: at the exact cor. point.

- Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap. From which:
- A fir, 9 ins. diam., bears N.27°E., 36 lks. dist., marked T2S R35E S8 (Old BT)
- A tamarack, 20 ins. diam., bears S.74°30'E., 59 lks. dist., marked T2S R35E S17 BT. (New BT)
- A tamarack, 20 ins. diam., bears S.31°W., 19 lks. dist., marked T2S R35E S18 BT. (Old BT.)
- A tamarack, 7 ins. diam., bears N.34°30'W., 55 lks. dist., marked T2S R35E S7 BT. (New BT.)

In 1983 Dennis Gaylord found the 1917 GLO Brass Cap, and notes two bearing trees are dead.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found 2" iron pipe with 2 1/2" Brass Cap marked as shown below. Remnants of East/West fence line exist. No other evidence found.

Range was marked "34" as found. An X was stamped over the number '4' and a "5" stamped alongside.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the iron pipe monument,

NEW BEARING TREES:


- A 7" Lodgepole Pine bears North 64° East, a distance of 41.25 feet, marked T2SR35ES8 BT.
- A 7" White Fir bears South 37° East, a distance of 12.05 feet, marked T2SR35ES17 BT.
- A 3" Douglas Fir bears South 61° West, a distance of 27.05 feet, marked X BT.
- An 8" Lodgepole Pine bears North 31° West, a distance of 32.70 feet, marked T2SR35ES7 BT.

I hereby certify that the corner was perpetuated October 25, 2017.

Witness: Kyle Tucker



Renewal Date: June 30, 2019

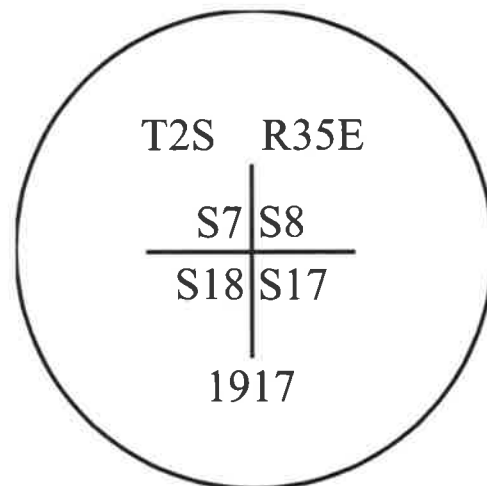

I used a steel tape and magnetic compass in the establishment of the bearing trees. Magnetic declination used was 13° East. Bearing is to a brass washer marked OPLS 83571 in the lower blaze of the tree. Distance is to a spike set in the root crown of the side of the tree.