

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Originally established by George S Pershin under GLO contract number 332, dated July 29, 1879. Surveyor's general record states:

Set Fir post on North slope for 1/4 sec. cor. from which:
Tamarack 8 in. di. brs. N. 28° E. 9 lks. dist.
Tamarack 9 in. di. brs. S. 63° W. 5 lks. dist.

In Survey N-65-B James Hambleton, LS 645, notes finding the original GLO corner but makes no reference as to perpetuation.

In Survey 93-64-C William R. Wells finds a 5/8" rebar with a plastic cap stamped LS 645. From which two recently cut BT's:


A 15" Tamarack stump marked 1/4S S26 X BT brs. S. 69 1/2° E., 17.7 ft.
A 12" Tamarack stump marked S S27 X BT brs. S. 50° W., 22.2 ft.

Set a 1 1/2"x 30" iron pipe with a 2 1/2" brass cap marked as indicated in the monument detail, 24" in the ground, from which:

An 8" fir brs. S. 25° E., 50.6 ft. marked T4N R37E S26 BT
A 7" fir brs. S. 88° W., 23.9 ft. marked T4N R37E S27 BT
An 8" fir brs. N. 28° W., 70.8 ft. marked T4N R37E S27 BT
A 9" fir brs. N. 52° E., 43.6 ft. marked T4N R37E S26 BT

Set steel fence post with Land Survey Monument N. 2.8 ft.

T 4 N R 37 E T-17

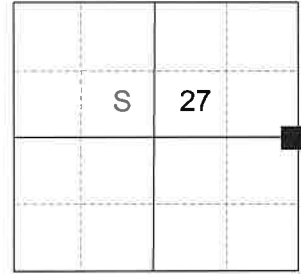

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 1" galvanized pipe with a 2 1/2" brass cap, 3" above ground, marked as shown below, from which:

A 16" diam. White Fir bears North 52° East, a distance of 43.60 feet, alive and vigorous with healed blaze.
An 18" diam. Fir stump bears South 25° East, a distance of 50.60 feet, dead and standing 4" tall with partial scribe visible on healed blaze.
A 7" diam. Fir bears South 88° West, a distance of 23.90 feet, dead and standing 6" tall with partial scribe visible on healed blaze.
A 15" diam. Douglas Fir bears North 28° West, a distance of 70.80 feet, alive and vigorous with healed blaze.

Steel fencepost bears North approximately 3 feet.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

From the galvanized iron pipe monument:


NEW BEARING OBJECTS:

An 11" diam. Douglas Fir bears South 40° East, a dist. of 22.65 feet marked 1/4 S26 BT.
A 15" diam. Douglas Fir bears South 83° West, a dist. of 60.80 feet marked 1/4 S27 BT.

Monument falls approx. 3 ft. North of North edge of East/West running forest road and within 5 ft. of multiple fence lines running East/West, of which the most recent construction being approx. 2 ft. South of the monument.

I hereby certify that the monument was perpetuated on July 27, 2022.

Witness: Kyle A. Tucker and Dan S. Drum

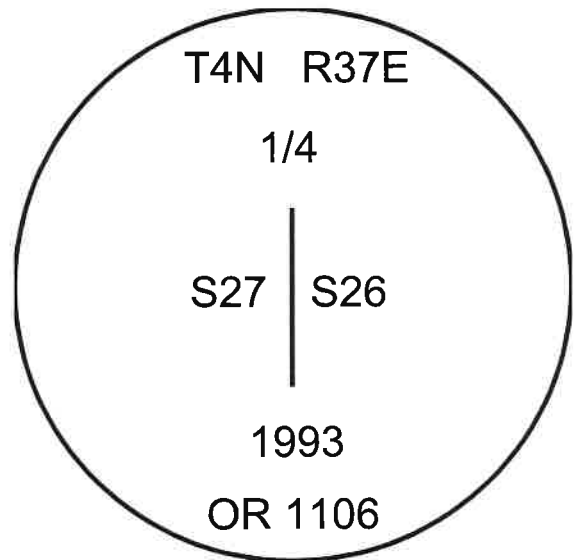

Renewal Date: June 30, 2023

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 14° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.