


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO Contract No. 635, dated April 19, 1895, executed by Marius Buchanan. Surveyor General field notes state:
Set a basalt stone 22x16x6 ins., 17 ins. in the ground for closing cor. of sec. 32 and 33, marked CC on N face with 4 notches on E. and 2 on W. edges and raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of cor.

T 1 S R 35 E Z-09

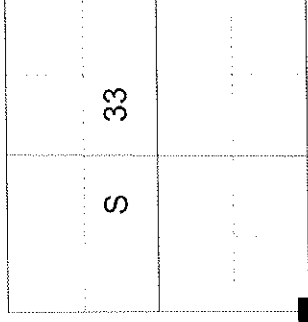

Corner reestablished in 1917 by GLO resurvey, executed by L.E. Wilkes. Field notes state:

At this point, 2 lks. S. of the old closing cor., I set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground for closing cor. of secs. 32 and 33, T1S. R35 E., with brass cap mkd.

C C
T1S R35E
S32 | S33
S5
T2S R35E
1917

from which:

A yellow pine, 30 ins. diam., bears N.65°W., 83 lks. dist. marked CC T1S R35E S32 BT.
A fir, 6 ins. diam., bears N.22°E., 21 lks. dist. marked CC T1S R35E S33 BT.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 2" iron pipe with 2 1/4" brass cap, 12" above ground, from which:
A 30" Ponderosa Pine stump bears North 65° West, a distance of 55 ft. with "BT" scribe visible.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:



From the brass cap monument,

NEW BEARING TREES:

A 14" Douglas Fir bears North 23° East, a distance of 13.25 feet, marked T1S R35E S33 BT.
A 10" Douglas Fir bears South 9° East, a distance of 32.60 feet, marked T2S R35E S5 BT.
An 11" Douglas Fir bears South 85° West, a distance of 2.40 feet, marked T2S R35E S5 BT.
An 8" Ponderosa Pine bears North 50° West, a distance of 27.35 feet, marked T1S R35E S32 BT.

I hereby certify that the corner was perpetuated on September 26, 2018.

Witness: Kyle Tucker

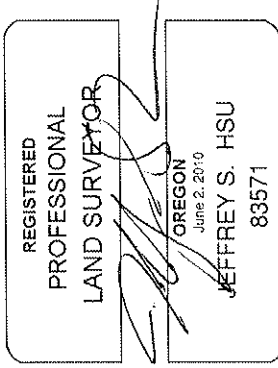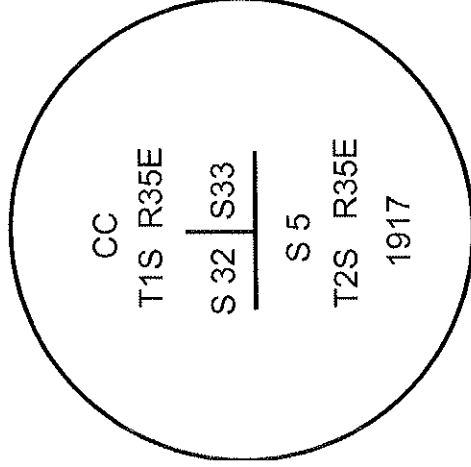

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 13° East declination, the distances are to a 60d spike driven into the side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

Renewal Date: June 30, 2019

Z-09

18-105-8