

LEGEND;
 ● SET 5/8" TERRA IRON ROD W/ CAP
 ○ FOUND MONUMENT OF RECORD
 □ CALCULATED NOT FOUND OR SET
 (36.00 CHAINS) DEED OR PLAT CALL
 (207) TERRA CORNER NUMBER

NARRATIVE;
 LINES WERE RUN BETWEEN MONUMENTS FOR LOGGING PURPOSES AND POSSIBLE NEW FENCING AT A FUTURE DATE. ALL CORNERS WERE SET IN MOUNDS OF STONE. NO MAJOR DISCREPANCIES WERE FOUND DURING THIS SURVEY.
 CRUSER CORNERS WERE FOUND AT MOST 1/16 CORNERS BUT WERE NOT TIED. THEIR POSITION ORIGIN COULD NOT BE VERIFIED BY A SURVEY OF RECORD.

LOCATION OF SURVEY;
 SECTION 13, RANGE 30 EAST & SECTION 18, RANGE 31 EAST, ALL OF TOWNSHIP 6 SOUTH, W.M., UMATILLA COUNTY, OR.

BASIS OF BEARING;
 TRUE NORTH AS DETERMINED BY THE 1978 SURVEY P-96-B BY PLS 346.

REFERENCES;
 PLS SURVEY P-96-B OF 1978, GLO SURVEYS OF SECTION 13, SECTION 18, AND THE RANGE LINE.

G.L.O. HISTORY
 J-21 PLS 346, 1978 BRASS CAP SEE HIS PLAT FOR GLO HISTORY.
 J-23 PLS 346, 1978 BRASS CAP SEE HIS PLAT FOR GLO HISTORY.
 J-25 PLS 346, 1978 BRASS CAP SEE HIS PLAT FOR GLO HISTORY.
 J-3 G.L.O. SET Y PINE POST 16" Y PINE N 60° W @ 54 LKS. 36" Y PINE S 16° E @ 96 LKS.
 L-21 G.L.O. SET PINE POST 20" PINE N 52° E @ 05 LKS. 18" PINE N 69° W @ 28 LKS.
 L-25 PLS 346, 1978 BRASS CAP SEE HIS PLAT FOR GLO HISTORY.

TERRA
 J-21 FOUND GOVERNMENT TYPE MONUMENT EXPOSED 6" WITH STONE ALONG SIDE. ORIGINAL BT IN GOOD SHAPE. TREE SCRIBING IS VISIBLE.
 J-23 MONUMENT 14" ABOVE GROUND IN MOUND OF STONE. PINE BT BEARS S. 10° W @ 14 LINKS DEAD AND DOWN, SCRIBING VISIBLE.
 J-25 FOUND PLS 346, 1978 BRASS CAP SLID DOWN THE STEEP SLOPE. USED HIS BT TREE CORNER POSITION. SET TERRA IRON ROD W/ CAP FROM SNAG BT SNAG BEARS S 16° E @ 96 LKS. SCRIBED 22" PINE "S 7 1/4 BT"; BRASS WASHER. TREE BEARS N 4 E @ 47.25'.
 J-3 SEARCHED BUT NOT FOUND.
 L-21 MONUMENT 6" ABOVE GROUND ALL BEARING TREES OK.

G.L.O. HISTORY
 L-5 G.L.O. BASALT STONE 12x12x10" 12" Y PINE N 67° E @ 44 LKS. 10" Y PINE N 35° W @ 27 LKS.
 N-21 G.L.O. BASALT STONE, 15x15x10" IN A MOUND OF STONE. 30" PINE N 6° W @ 82 LKS. 30" PINE S 29° W @ 125 LKS.
 N-23 G.L.O. SET PINE POST 18" PINE S 9° E @ 80 LKS. 40" PINE N 31° W @ 13 LKS.

TERRA
 L-5 FOUND PINE 10" NOW 14" N 33° W @ 17.80' PER NOTES. FOUND 12x12x10" BASALT STONE DOWN HILL SLIGHTLY, PROBABLY LOGGING, SET 5/8"x30" IRON ROD IN MOUND OF STONE & PLACED G.L.O. STONE JUST EAST OF SET IRON ROD. PLACED BEARING TREE TAG AND BRASS WASHER & PAINTED 6" RING ON TREE & VISIBLE SCRIBING. 24" PINE BEARS S 25-10 E @ 56.47' SCRIBED "S 17 1/4 BT"
 N-21 FOUND BRASS CAP W/ GALVANIZED PIPE 12" ABOVE GROUND IN MOUND OF STONE. BT'S OF RECORD IN GOOD SHAPE. FOUND ORIGINAL BT PINE SNAG FELL OVER, SCRIBING FACING GROUND ORIGINAL 30" PINE S 29° W @ 125 LKS.
 N-23 FOUND ROWS OF STONE WITH SMALL STONE IN CENTER. FOUND USFS TAG CDH 5-27-1954 ON 20" DOUG FIR. PLACED 5/8" IRON ROD WITH CAP IN MOUND OF STONE. 20" FIR BEARS N 39° W @ 11.85' NO TREE FOR S 24


G.L.O. HISTORY
 N-25 G.L.O. BASALT STONE 12x8x8" WITH GROUND. STONES WERE HAND PLACED. SET "X" IN STONE TO MEASURE FROM. 10" JUNIPER S 40° W @ 10.7' 22" PINE N 09° W @ 85.05' SCRIBED S24 R30 BT W/ WASHER. FOUND BT TAG SAYS N 54° E @ 102 LKS. FOUND NO STONE OR MOUND ETC.
 N-3 G.L.O. SET FIR POST 26" FIR N 22° E @ 97 LKS. 07" FIR S 00° W @ 39 LKS.

TERRA
 N-25 FOUND G.L.O. STONE 12x8x8" IN STONE RING, SET FLUSH WITH GROUND. STONES WERE HAND PLACED. SET "X" IN STONE TO MEASURE FROM. 10" JUNIPER S 40° W @ 10.7' 22" PINE N 09° W @ 85.05' SCRIBED S24 R30 BT W/ WASHER. FOUND BT TAG SAYS N 54° E @ 102 LKS. FOUND NO STONE OR MOUND ETC.
 N-3 FOUND 1/4 CORNER BETWEEN SECTION 18 & 19 SET TERRA IRON ROD IN NEWLY RECONSTRUCTED FARM LOG HAUL ROAD. FOUND ORIGINAL FIR 7" BT SOUTH @ 25.74' SET IRON ROD FROM BT. PLACED "X" ON TOP OF STONE 3x4.5x2.3' ON EAST SIDE OF FENCE STONE BEARS N 78° E @ 19.88' PLACED 6" RING & BT SIGN ON ORIGINAL TREE NOW 23" DIA. 2ND BT HAS BEEN WASHED AWAY AND DESTROYED.

RECEIVED BY
 Umatilla County Surveyor
 Date 8-93
 Rec'd By [Signature]
 No. 93-63-B

**SURVEY FOR
 ESSON & TERRY SMITH---WKO**

RECEIVED BY
 Umatilla County Surveyor
 Date
 No.

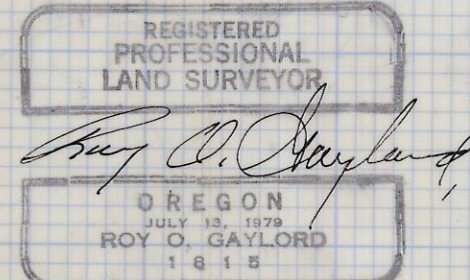

TERRA SURVEYING;
 DATE; JUNE, 1993
 SCALE; 1"=600'
 PROJECT; 9244
 PO BOX 617
 HOOD RIVER, OR. 97031
 PHONE; (503) 396-4531